

The feeders with one mobil gripper have been developed for applications requiring high accuracy and speed up to 200 strokes / minute. It could be use on application with pulling feeder, because it more compact and cheaper. The clamps gripper don't destroy the strip with their large surface contact.

| CAPACITY                | Pneumatical gripper | Hydraulic gripper |
|-------------------------|---------------------|-------------------|
| Maxi width strip        | 120 mm              | 120 mm            |
| Mini Thickness strip    | 0,1 mm              | 0,1 mm            |
| Maxi Thickness strip    | 3 mm                | 6 mm              |
| Pitch accuracy : +/- mm | 0,03 mm             | 0,03 mm           |
| Maxi strip section      | 300 mm²             | 600 mm²           |
| Maxi clamps force       | 470 daN             | 900 daN           |

For additional information on our modules please contact the sales department

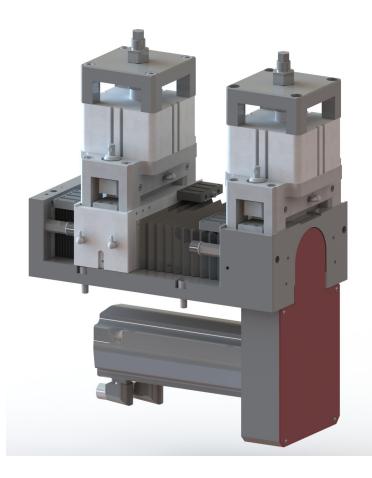


Table cadence Loop weight 10 kgs

| Start<br>angle | Pitch  | Speed<br>str/ min |
|----------------|--------|-------------------|
| 90°            | 20 mm  | 200               |
|                | 60 mm  | 130               |
|                | 100 mm | 102               |
| 120°           | 20 mm  | 220               |
|                | 60 mm  | 172               |
|                | 100 mm | 136               |

